




Dry Contact Relay Card

Compatible with SSG and SSG-RP UPS Models

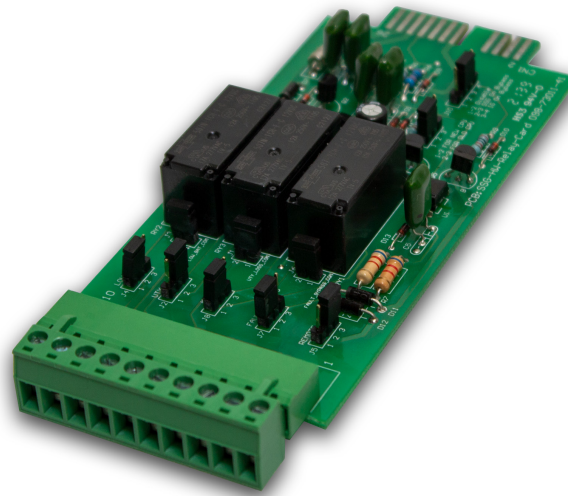

Dry Contact Relay Card Advantages:

- UPS Monitoring**
 Falcon's Dry Contact Relay Card facilitates UPS status via configurable relay contact activation for simple integration into existing PLC/monitoring systems.
- Notification & Remote Shutdown Capability**
 Provides relay contact activation during a UPS event including utility power loss, low battery, UPS fault and bypass condition. Supports safe shutdown of the UPS after a utility power loss event.
- Flexible Configuration**
 Easily installs into all SSG and SSG-RP UPS models. Configurable to allow simple selection of active open or closed relay contacts.
- Simple Integration**
 The detachable connection facilitates simple integration into existing programmable logic controller (PLC) or management systems.

Model Number	UA88246
Electrical	
Rated Voltage	48Vdc
Rated Current	1 Amp
Relay Contact Type	Form C
Environmental	
Operating Temperature	-30°C to 65°C (-22°F to 149°F)
Humidity	10 to 90% Non-Condensing
Altitude	10,000 Feet (3,000 Meters)
Dimensions H x W x D inches (mm)	5.1 x 2.3 x .75 (130 x 58.4 x 19)

© 2022 Falcon® Electric, Inc. All rights reserved. Falcon® and the Falcon Electric logo are registered trademarks of Falcon Electric, Inc. All other brand names and trademarks are the property of their respective owners. The information and specifications stated in this document are subject to change without notice. 7-2022